




a world of solutions

## smart solutions for the labeling industry

### All-In-One Rewinder and Unwinder Series

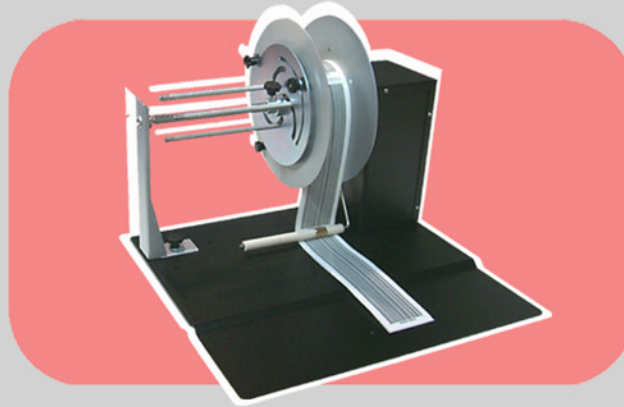

Specific for Inkjet Printers like PRIMERA®, VIPCOLOR®, for the TOSHIBA TEC® Thermal Printers and for all the label printers having the automatic label back-feed feature.

Primera, VipColor, Toshiba Tec are trademarks of Primera, VipColor and Toshiba Tec

All-In-One Rewinder and Unwinder Series can be right or left and it is possible to choose between two different options of speed: 120 rpm or 225 rpm. It can handle labels up to 210 mm wide and it can rewind rolls of labels with diameter up to 300 mm. It is possible to choose between two different types of core holder: the adjustable core holder from 46 mm up to 118 mm or the core holder of 1 inch. It is also possible to add a second optional support for heavy rolls. The all-in-one rewinder and unwinder has an external power supply of 220/18 Vac and an electronic circuit controls all the functions. The plate of the all-in-one rewinder and unwinder was designed so that the printer can be laid on it in order to guarantee correct stability and alignment. This allows the printer to avoid any possible overturn or interference.

The tension arm position, with reference to the printer's state, is calibrated as it follows: - When it is in the central position, the device is idle - When it is down, the device rewinds the labels - When it is up, the device unwinds the labels.

The obtained roll will have the labels face out only. When the roll of labels runs out, the device stops thanks to the contact between the tension arm and the plate. An acoustic signal sounds to let you know the roll is finished. All-In-One Rewinder and Unwinder Series is available in many different versions and every model is marked by its own code. Through the configuration table (see below), it is possible to select the version better fitting your needs and to obtain the code of the product to order.

Configuration table - Example **ASD1211-S1**

AS	D/S	1/2	1/2	1/2/3	1/2	S0/S1/S2
Type	Version	Roll Diameter	Speed	Label Width	Core Holder	Support (optional)
AS All In One Rewinder and Unwinder	D Right	1 250 mm	1 120 rpm	1 120 mm	1 Adjustable 46 - 118 mm	S0 Without
	S Left	2 300 mm	2 225 rpm	2 160 mm	2 1 Inch with springs and fork	S1 250 mm
				3 210 mm		S2 300 mm