




a world of solutions

smart solutions for the labeling industry

Motorized Unwinder Series

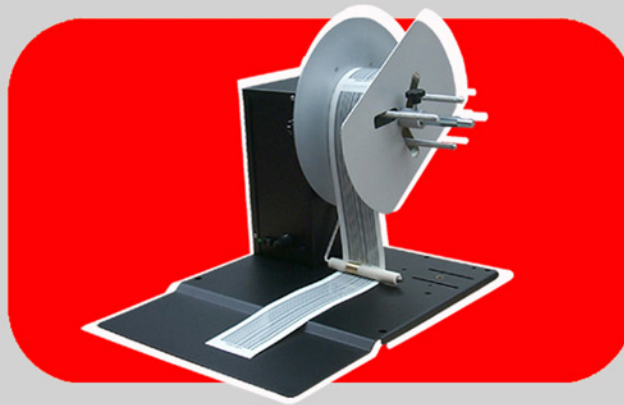

Motorized Unwinder Series can be right or left and it is possible to choose between two different options of speed: 120 rpm or 225 rpm. It can handle labels up to 210 mm wide and it can unwind rolls of labels with diameter up to 300 mm. It is possible to choose between two different types of core holder: the adjustable core holder from 46 mm up to 118 mm or the core holder of 1 inch. It is also possible to add a second optional support for heavy rolls. **Motorized Unwinder Series can be used with any type of label printer.** The unwinder is positioned behind the printer in case the printer does not include a place big enough to store the roll of labels. It has an external power supply of 220/18 Vac and an electronic circuit controls all the functions. When the roll of labels runs out, the unwinder stops by uttering an acoustic signal. On the motorized unwinder, the tension arm adjusts the speed of rotation and when it is up, the unwinder turns at full speed, while when it is down, the unwinder is idle. Motorized Unwinder Series is available in many different versions and every model is marked by its own code. Through the configuration table (see below), it is possible to select the version better fitting your needs and to obtain the code of the product to order.

IMPORTANT

In case that you want to use an unwinder together with a rewriter: A left unwinder has to be matched with a right rewriter - A right unwinder has to be matched with a left rewriter.

Configuration table - Example **SS1211-S1**

S	D/S	1/2	1/2	1/2/3	1/2	S0/S1/S2
Type	Version	Roll Diameter	Speed	Label Width	Core Holder	Support (optional)
S Unwinder	D Right	1 250 mm	1 120 rpm	1 120 mm	1 Adjustable 46 - 118 mm	S0 Without
	S Left	2 300 mm	2 225 rpm	2 160 mm	2 1 Inch with springs	S1 250 mm
				3 210 mm		S2 300 mm